
# DATA SHEET - CONICAL CONCRETE BUCKET WITH RUBBER HOSE AND VALVE AT THE END OF THE HOSE

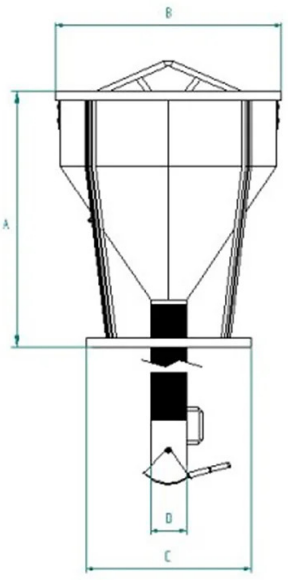


| Code | Capacity (kg) | Capacity (L) | Weight (kg) | Dimensions (mm) | | | |
|---|---|---|---|---|---|---|---|
| | | | | A | B | C | D |
| CT-40VALT | 1040 | 400 | | | | | |
| CT-50VALT | 1300 | 500 | 110 | 1250 | 1050 | 880 | 150 |
| CT-80VALT | 2080 | 800 | 155 | 1490 | 1250 | 930 | 150 |
| CT-99VALT | 2600 | 1000 | 170 | 1770 | 1345 | 1080 | 150 |
| CT-150VALT | 3900 | 1500 | 230 | 2170 | 1255 | 950 | 150 |
| CT-150NVALT | 3900 | 1500 | | | | | |
| CT-200NVALT | 5200 | 2000 | | | | | |

**DATA SHEET - CONICAL CONCRETE BUCKET WITH RUBBER HOSE AND VALVE AT THE END OF THE HOSE**

**Concrete buckets**

# Conical concrete bucket with rubber hose and valve at the end of the hose

## Conical concrete bucket with central discharge, rubber hose, and valve at the end of the hose

We are pleased to introduce our CT-VALT model conical concrete bucket, designed to offer a more efficient and controlled pouring experience. The CT-VALT model features a central discharge with a robust and flexible 150 mm diameter rubber hose, equipped with a manual opening and closing valve at the end. This feature allows greater control over the flow of concrete during pouring, enabling quick and precise interruption and resumption of pouring. All our buckets are built and tested in accordance with stringent UNI EN ISO 12100, UNI EN 13854, ISO 8686, UNI EN 10027, and UNI EN 10204 standards. Each product is accompanied by a metal ID plate, conformity certificate, and operation and maintenance manual to ensure proper use over time. Additionally, all our products are covered by a one-year warranty, in compliance with the European Directive.

### Application sectors

Construction